

Max-Therm Thermal Interface material -Thermal Pad


GP3000 series

General Usage:

GP3000 is using the silicone rubber with acting advanced thermal conductivity, it is a ceramic particles filled silicone rubber, which is a highly conformal and thermally conductive thermal pad. It is used between heat sink and heat generating components. Its ultra soft proper enable filling air voids and rugged surface, and wetting out matting surfaces in order to efficiently transfer heat from components to heat sink.

Benefit:

- Continuous roll package rubber
- General Thermal conductivity
- Ultra soft, highly compressible
- Good wetting
- Self tacky or additional PSA if required

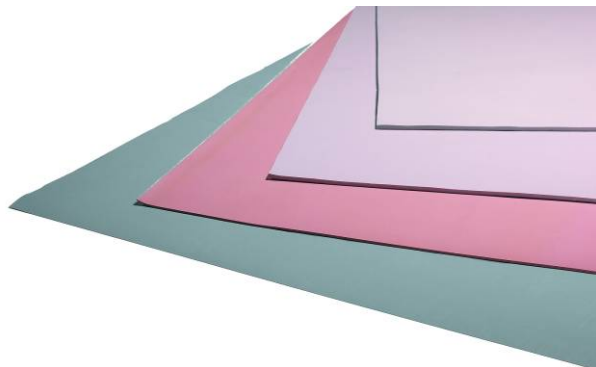

Typical Applications:

- Information products
- BGA
- Power module

Typical Properties:

GP3000 series	Test method	GP3100	GP3150	GP-3200	GP3250	GP3300	GP3500
Construction & Composition		Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
Color		Gray	Gray	Gray	Gray	Gray	Gray
Thickness (mm)		1.00mm	1.50mm	2.00mm	2.50mm	3.00mm	5.00mm
Thickness Tolerance (mm)		±10%	±10%	±10%	±10%	±10%	±10%
Density (g/cc)		2.8	2.8	2.8	2.8	2.8	2.8
Hardness (Shore OO)	ASTM D 2240	30-35	30-35	30-35	30-35	30-35	30-35
Tensile Strength	ASTM D 638	66 psi	66 psi	66 psi	66 psi	66 psi	66 psi
Elongation (%)	ASTM D 412	56	56	56	56	56	56
Outgassing TML *Post Cured (%)	ASTM D 150	0.29	0.29	0.29	0.29	0.29	0.29
Outgassing CVCM *Post Cured (%)		0.04	0.04	0.04	0.04	0.04	0.04
UL Rating		94V0	94V0	94V0	94V0	94V0	94V0
Continuous Use Temp (°C)	TGA+DMA	-40~200	-40~200	-40~200	-40~200	-40~200	-40~200
Thermal Conductivity (W/mk)	ASTM 5470/E 1530	2.0	2.0	2.0	2.0	2.0	2.0
Thermal Impedance @10psi (°C-in²/W)		1.33	1.73	2.1	2.37	2.56	3.42
@69KPa(°C-cm²/W)		8.57	11.16	13.63	15.95	17.33	21.93
Thermal Expansion (ppm/C)		70	70	70	70	70	70
Dielectric Strength (Volts)		>7,000	>7,000	>7,000	>7,000	>7,000	>7,000
Volume Resistivity (ohm-cm)	ASTM D 257	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³
Dielectric Constant @1MHz	ASTM D 150	6.1	6.1	6.1	6.1	6.1	6.1

TennVac Inc. (Taiwan)
Tel: +886 2 26951213
Fax: +886 226951187
Email: sales@tennvac.com

TennVac Technology (Shenzhen) Co. Ltd
Tel: +86 755 26951701
Fax: +86 755 26952411
Email: sales@tennvac.com

TennMax Electronic Material (Kunshan) Co. Ltd
Tel: +86 512 57603910
Fax: +86 512 57603915
Email: sales@tennvac.com

TennMax America Inc.
Tel: +1 (360) 5463824
Fax: +1 (360) 5668088
Email: jeff@tennmaxusa.com

Thin series						
GP3000 series	Test method	GP3013	GP3025	GP3030	GP3050	GP3075
Construction & Composition		Silicone	Silicone	Silicone	Silicone	Silicone
Color		Gray	Gray	Gray	Gray	Gray
Thickness (mm)		0.13mm	0.25mm	0.3mm	0.50mm	0.75mm
Thickness Tolerance (mm)		±10%	±10%	±10%	±10%	±10%
Density (g/cc)		2.8	2.8	2.8	2.8	2.8
Hardness (Shore OO)	ASTM D 2240	65	65	45	45	45
Tensile Strength	ASTM D 638	N/A	66 psi	66 psi	66 psi	66 psi
Elongation (%)	ASTM D 412	N/A	56	56	56	56
Outgassing TML *Post Cured (%)	ASTM D 150	0.29	0.29	0.29	0.29	0.29
Outgassing CVCM *Post Cured (%)		0.04	0.04	0.04	0.04	0.04
UL Rating		94V0	94V0	94V0	94V0	94V0
Continuous Use Temp (°C)	TGA+DMA	-40~200	-40~200	-40~200	-40~200	-40~200
Thermal Conductivity (W/mk)	ASTM 5470/E 1530	2.0	2.0	2.0	2.0	2.0
Thermal Impedance @10psi (°C-in²/W)		0.28	0.42	0.51	0.67	1
@69KPa(°C-cm²/W)		1.78	2.67	3.23	4.33	6.45
Thermal Expansion (ppm/C)		70	70	70	70	70
Dielectric Strength (Volts)		>4,000	>5,000	>5,000	>7,000	>7,000
Volume Resistivity (ohm-cm)	ASTM D 257	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³
Dielectric Constant @1MHz	ASTM D 150	6.1	6.1	6.1	6.1	6.1

Thin series with Glass Fabric						
GP3000 series	Test method	GP3013G	GP3025G	GP3030G	GP3050G	GP3075G
Construction & Composition		Silicone	Silicone	Silicone	Silicone	Silicone
Color		Gray	Gray	Gray	Gray	Gray
Thickness (mm)		0.13mm	0.25mm	0.3mm	0.50mm	0.75mm
Carrier		Glass Fabric	Glass Fabric	Glass Fabric	Glass Fabric	Glass Fabric
Thickness Tolerance (mm)		±10%	±10%	±10%	±10%	±10%
Density (g/cc)		2.8	2.8	2.8	2.8	2.8
Hardness (Shore OO)	ASTM D 2240	65	65	45	45	45
Tensile Strength	ASTM D 638	N/A	135psi	135psi	135psi	135psi
Elongation (%)	ASTM D 412	N/A	28	28	28	28
Outgassing TML *Post Cured (%)	ASTM D 150	0.29	0.29	0.29	0.29	0.29
Outgassing CVCM *Post Cured (%)		0.04	0.04	0.04	0.04	0.04
UL Rating		94V0	94V0	94V0	94V0	94V0
Continuous Use Temp (°C)	TGA+DMA	-40~200	-40~200	-40~200	-40~200	-40~200
Thermal Conductivity (W/mk)	ASTM 5470/E 1530	2.0	2.0	2.0	2.0	2.0
Thermal Impedance @10psi (°C-in²/W)		0.29	0.43	0.52	0.69	1.02
@69KPa(°C-cm²/W)		1.89	2.74	3.34	4.35	6.48
Thermal Expansion (ppm/C)		70	70	70	70	70
Dielectric Strength (Volts)		>4,000	>5,000	>5,000	>7,000	>7,000
Volume Resistivity (ohm-cm)	ASTM D 257	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³	1.2×10 ¹³
Dielectric Constant @1MHz	ASTM D 150	6.1	6.1	6.1	6.1	6.1

This information and our technical advise – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

TennVac Inc. (Taiwan)
 Tel: +886 2 26951213
 Fax: +886 226951187
 Email: sales@tennvac.com

TennVac Technology (Shenzhen) Co. Ltd
 Tel: +86 755 26951701
 Fax: +86 755 26952411
 Email: sales@tennvac.com

TennMax Electronic Material (Kunshan) Co. Ltd
 Tel: +86 512 57603910
 Fax: +86 512 57603915
 Email: sales@tennvac.com

TennMax America Inc.
 Tel: +1 (360) 5463824
 Fax: +1 (360) 5668088
 Email: jeff@tennmaxusa.com