

Max-Therm Thermal Interface material -Gap Filler Pad


GP8000 series

General Usage:

GP8000 is using the silicone rubber with excellent thermal conductivity, it is a special treated high performance ceramic particles filled silicone rubber, which is a highly conformal and thermally conductive gap filler pad. It is used between heat sink and heat generating components. Its ultra soft proper enable filling air voids and rugged surface, and wetting out matting surfaces in order to efficiently transfer heat from components to heat sink.

Benefit:

- Continuous roll package rubber
- Excellent Thermal conductivity
- Ultra soft, highly compressible
- Good wetting
- Self tacky or additional PSA if required

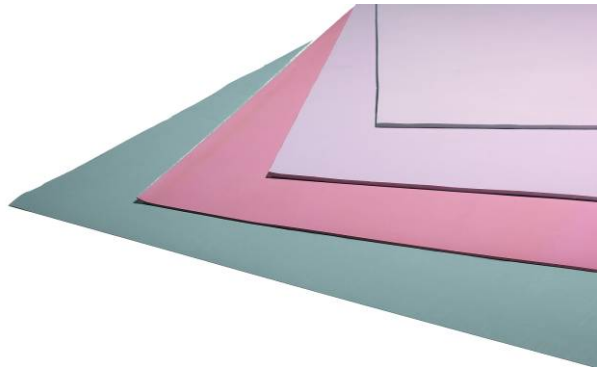

Typical Applications:

- Information products
- BGA, Micro Processors, Graphic Processors.
- Power module

Typical Properties:

GP8000 series	Test method	GP8050	GP8100	GP8150	GP8250
Construction & Composition		Silicone	Silicone	Silicone	Silicone
Color		Light Grey	Light Grey	Light Grey	Light Grey
Thickness (mm)		0.5mm	1.0mm	1.5mm	2.5mm
Thickness Tolerance (mm)		±10%	±10%	±10%	±10%
Density (g/cc)		2.55	2.55	2.55	2.55
Hardness (Shore OO)	ASTM D 2240	55	55	55	55
Tensile Strength	ASTM D 638	42 psi	42 psi	42 psi	42 psi
Elongation (%)	ASTM D 412	25	25	25	25
Outgassing TML *Post Cured (%)	ASTM D 150	0.29	0.29	0.29	0.29
Outgassing CVCm *Post Cured (%)		0.04	0.04	0.04	0.04
UL Rating		94V0	94V0	94V0	94V0
Continuous Use Temp (°C)	TGA+DMA	-40 ~ 200	-40 ~ 200	-40 ~ 200	-40 ~ 200
Thermal Conductivity (W/mk)	ASTM 5470/E 1530	7.8	7.8	7.8	7.8
Thermal Impedance @10psi (°C-in²/W)		0.06	0.11	0.14	0.21
@69KPa(°C-cm²/W)		0.39	0.72	0.92	1.37
Thermal Expansion (ppm/C)		58	36	36	36
Dielectric Strength (Volts)		NA	NA	NA	NA
Volume Resistivity (ohm-cm)	ASTM D 257	>10 ¹³	>10 ¹³	>10 ¹³	>10 ¹³
Dielectric Constant @1MHz	ASTM D 150	NA	NA	NA	NA

This information and our technical advise – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

TennVac Inc. (Taiwan)
Tel: +886 2 26951213
Fax: +886 226951187
Email: sales@tennvac.com

TennVac Technology (Shenzhen) Co. Ltd
Tel: +86 755 26951701
Fax: +86 755 26952411
Email: sales@tennvac.com

TennMax Electronic Material (Kunshan) Co. Ltd
Tel: +86 512 57603910
Fax: +86 512 57603915
Email: sales@tennvac.com

TennMax America Inc.
Tel: +01 (360) 5463824
Fax: +01 (360) 5668088
Email: jeff@tennmaxusa.com