

# Max-Therm Thermal Interface material -Thermal Pad


## GP8000 series

### General Usage:

GP8000 is using the silicone rubber with excellent thermal conductivity, it is a special treated high performance ceramic particles filled silicone rubber, which is a highly conformal and thermally conductive thermal pad. It is used between heat sink and heat generating components. Its ultra soft proper enable filling air voids and rugged surface, and wetting out matting surfaces in order to efficiently transfer heat from components to heat sink.

### Benefit:

- Continuous roll package rubber
- Excellent Thermal conductivity
- Ultra soft, highly compressible
- Good wetting
- Self tacky or additional PSA if required

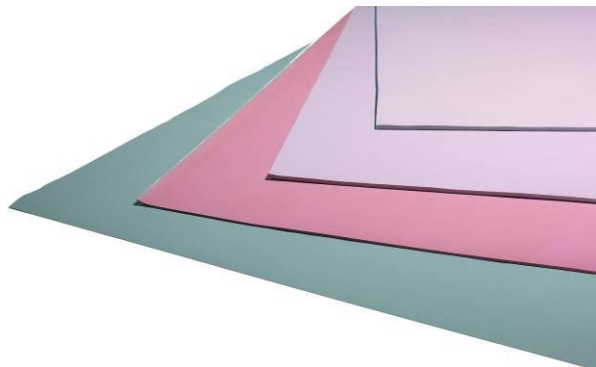

### Typical Applications:

- Information products
- BGA, Micro Processors, Graphic Processors.
- Power module

### Typical Properties:

GP8000 series	Test method	GP8025	GP8050	GP8100	GP8150	GP8200	GP8250	GP8500
Construction & Composition		Silicone						
Color		Light Grey						
Density (g/cc)		2.55						
Tensile Strength	ASTM D 638	42 psi						
Elongation (%)	ASTM D 412	25						
Outgassing TML *Post Cured (%)	ASTM E 595	0.03						
Outgassing CVCM *Post Cured (%)		0.04						
UL Rating		94V0						
Continuous Use Temp (°C)	TGA+DMA	-40 ~ 200						
Thermal Conductivity (W/mk)	ASTM 5470/E 1530	7.8						
Thermal Expansion (ppm/C)		36						
Thickness (mm)		0.25mm	0.5mm	1.0mm	1.5mm	2.0mm	2.5mm	5.0mm
Thickness Tolerance (mm)		±10%	±10%	±10%	±10%	±10%	±10%	±10%
Hardness (Shore OO)	ASTM D 2240	70	55	55	55	55	55	55
Thermal Impedance @10psi (°C-in <sup>2</sup> /W)		0.04	0.06	0.11	0.14	0.17	0.21	0.41
@69KPa(°C-cm <sup>2</sup> /W)		0.26	0.38	0.71	0.90	1.09	1.35	2.63
Volume Resistivity (ohm-cm)	ASTM D 257	>10 <sup>12</sup>	>10 <sup>13</sup>					

This information and our technical advise – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

**TennVac Inc. (Taiwan)**  
Tel: +886 2 26951213  
Fax: +886 226951187  
Email: sales@tennvac.com

**TennVac Technology (Shenzhen) Co. Ltd**  
Tel: +86 755 26951701  
Fax: +86 755 26952411  
Email: sales@tennvac.com

**TennMax Electronic Material (Kunshan) Co. Ltd**  
Tel: +86 512 57603910  
Fax: +86 512 57603915  
Email: sales@tennvac.com

**TennMax America Inc.**  
Tel: +1 (360) 5463824  
Fax: +1 (360) 5668088  
Email: jeff@tennmaxusa.com